

# DALLAS

SEMICONDUCTOR

# DS9092R

iButton™ Port


## FEATURES

- Empty stainless steel F5 MicroCan with opening in rear and solder tabs.
- Acts as a touch contact for remotely located 1-Wire™ devices
- Together with DS2404S-C01 makes complex functions involving microcontrollers behave as if they were iButtons.
- Available with "CERTIFIED DALLAS TOUCH" logo

## DESCRIPTION


The DS9092R iButton Port provides the electrical contact necessary for mating remotely located iButtons or other 1-Wire MicroLAN devices with reader/writers. The DS9092R is also available with logo.

## APPLICATIONS

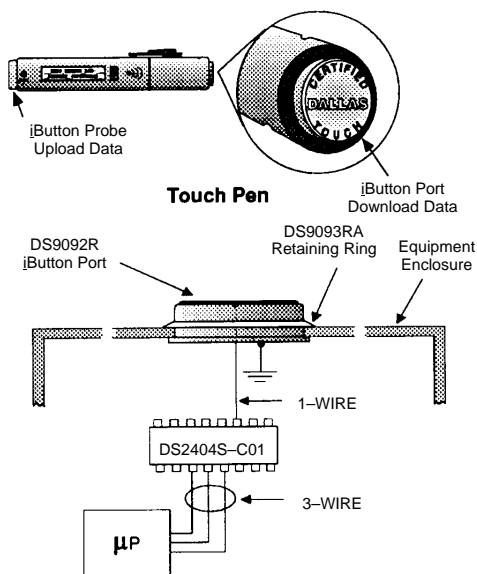

Equipment fitted with 1-Wire button contact.

## PACKAGE OUTLINE

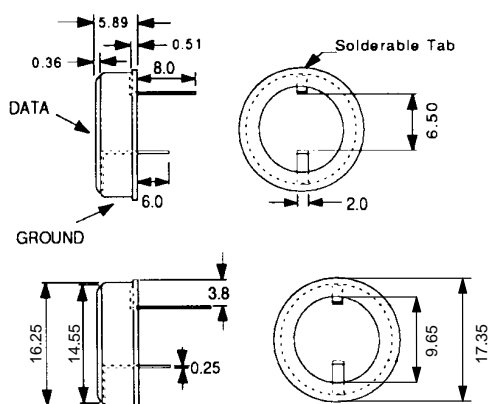

All dimensions are shown in millimeters.

## CONTACTS

Rim                      Ground  
Inner Face              Data

## ORDERING INFORMATION

DS9092R                      Tabbed F5 MicroCan  
DS9092RC                      Tabbed F5 MicroCan with logo